

### KEY FEATURES


- 12" woofer with 4" voice coil and 2,8" voice coil compression driver
- Program power: 800 W LF / 180 W HF
- Sensitivity: 98 dB LF and 105 dB HF
- Low weight and compact common magnet system design
- Demodulating rings in LF and HF units
- Composite Titanium/Mylar diaphragm
- Waterproof LF cone
- 60° coverage horn for HF dispersion control

### TECHNICAL SPECIFICATIONS

|  |          |  |
|--|----------|--|
| <b>Nominal diameter</b>                  | 300 mm   | 12 in                                      |
| <b>Rated impedance (LF/HF)</b>           |          | 8 / 16 $\Omega$                            |
| <b>Minimum impedance (LF/HF)</b>         |          | 6,8 / 11,3 $\Omega$                        |
| <b>Power capacity* (LF/HF)</b>           |          | 400 / 90 W <sub>AES</sub>                  |
| <b>Program power (LF/HF)</b>             |          | 800 / 180 W                                |
| <b>Sensitivity (LF/HF**)</b>             |          | 98 dB 1W @ Z <sub>N</sub>                  |
|  |          | 105 dB 1W @ Z <sub>N</sub>                 |
| <b>Frequency range</b>                   |          | 35 - 20.000 Hz                             |
| <b>Recom. HF crossover</b>               |          | 1,5 kHz or higher<br>(12 dB/oct min slope) |
| <b>Voice coil diameter (LF/HF)</b>       | 101,6 mm | 4 in                                       |
|  | 72,2 mm  | 2,84 in                                    |
| <b>BL factor</b>                         |          | 18,1 N/A                                   |
| <b>Moving mass</b>                       |          | 0,048 kg                                   |
| <b>Voice coil length</b>                 |          | 16 mm                                      |
| <b>Air gap height</b>                    |          | 9 mm                                       |
| <b>X<sub>damage</sub> (peak to peak)</b> |          | 28 mm                                      |



### DIMENSION DRAWINGS

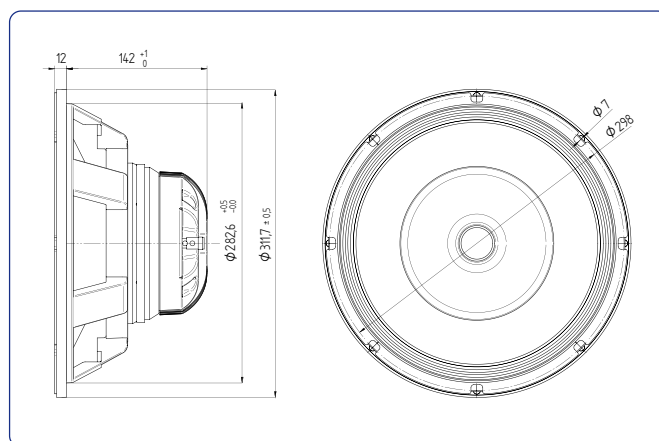

### MOUNTING INFORMATION

|                                   |          |                      |
|-----------------------------------|----------|----------------------|
| <b>Overall diameter</b>           | 311,7 mm | 12,27 in             |
| <b>Bolt circle diameter</b>       | 298 mm   | 11,73 in             |
| <b>Baffle cutout diameter:</b>    |          |                      |
| - Front mount                     | 282,6 mm | 11,13 in             |
| - Rear mount                      | 286 mm   | 11,26 in             |
| <b>Depth</b>                      | 154 mm   | 6,06 in              |
| <b>Volume displaced by driver</b> | 6,5 l    | 0,23 ft <sup>3</sup> |
| <b>Net weight</b>                 | 7,18 kg  | 15,83 lb             |
| <b>Shipping weight</b>            | 8,05 kg  | 17,75 lb             |

#### Notes:

\* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

\*\* Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz.


\*\*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

\*\*\*\* The X<sub>max</sub> is calculated as (L<sub>vc</sub> - H<sub>ag</sub>)/2 + (H<sub>ag</sub>/3,5), where L<sub>vc</sub> is the voice coil length and H<sub>ag</sub> is the air gap height.

### THIELE-SMALL PARAMETERS\*\*\*


|  |                      |
|--|----------------------|
| <b>Resonant frequency, f<sub>s</sub></b>                       | 45 Hz                |
| <b>D.C. Voice coil resistance, R<sub>e</sub></b>               | 6,6 $\Omega$         |
| <b>Mechanical Quality Factor, Q<sub>ms</sub></b>               | 6,24                 |
| <b>Electrical Quality Factor, Q<sub>es</sub></b>               | 0,28                 |
| <b>Total Quality Factor, Q<sub>ts</sub></b>                    | 0,26                 |
| <b>Equivalent Air Volume to C<sub>ms</sub>, V<sub>as</sub></b> | 102,2 l              |
| <b>Mechanical Compliance, C<sub>ms</sub></b>                   | 260 $\mu$ m / N      |
| <b>Mechanical Resistance, R<sub>ms</sub></b>                   | 2,19 kg / s          |
| <b>Efficiency, <math>\eta_0</math></b>                         | 3,25 %               |
| <b>Effective Surface Area, S<sub>d</sub></b>                   | 0,055 m <sup>2</sup> |
| <b>Maximum Displacement, X<sub>max</sub> ****</b>              | 6 mm                 |
| <b>Displacement Volume, V<sub>d</sub></b>                      | 210 cm <sup>3</sup>  |
| <b>Voice Coil Inductance, L<sub>e</sub> @ 1 kHz</b>            | 1 mH                 |

### FREQUENCY RESPONSE

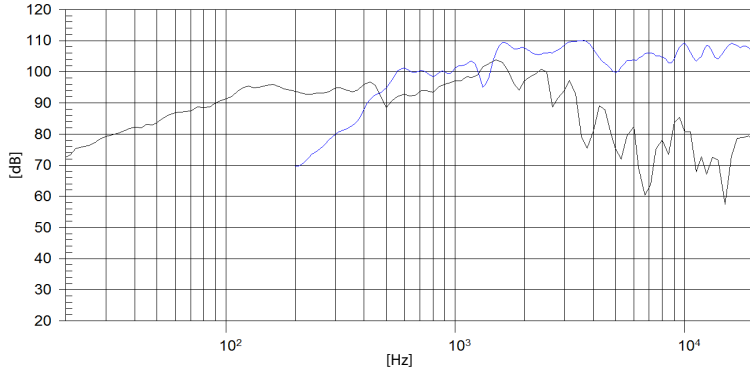


**Note:** On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

### FREE AIR IMPEDANCE CURVE

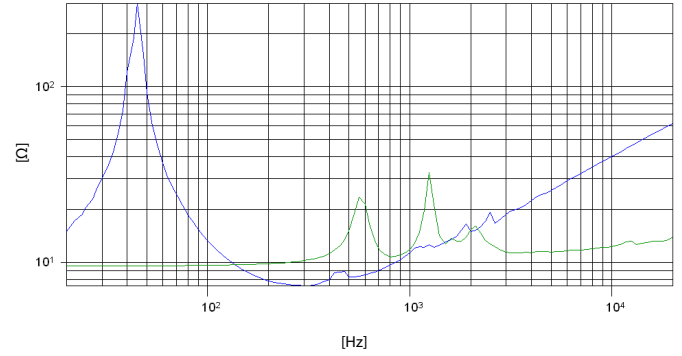

### FILTERED FREQUENCY RESPONSE

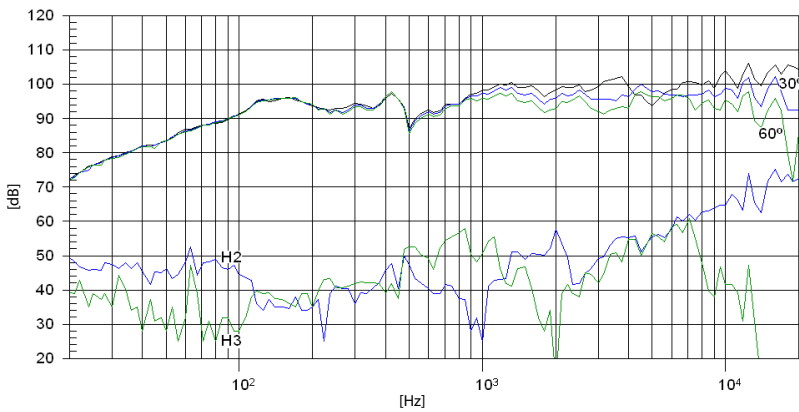

**Note:** Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m with FD-2XA

### POLAR PATTERN

