


CH250




Extended range
Dual cone
Cellulose fiber membrane and surround

GENERAL SPECIFICATIONS



Program power	150 W
Rated impedance	4 Ω
Nominal diameter	10"- 250 mm
Sensitivity (1W/1m)	96 dB
Voice coil diameter	32 mm
Frequency range	40 - 18000 Hz

TECHNICAL SPECIFICATIONS

Power handling capacity	50 W
Gap height	6 mm
N. of mounting holes	8 ø 6 / ø 253
Front mount baffle cutout ø	238 mm
Re	3,40 Ω
Fs	65 Hz
Qms	12,80
Qes	1,53
Qts	1,36
Mms	18,60 g
Cms	0,32 mm/N
D	208 mm
Vas	52 dm³
B · l	4,10 Wb/m
Xmax	0,50 mm
η _o	0,89 %
Le	0,24 mH
Net Weight	1,35 Kg
Recommended loading	Baffle / Sealed box
Volume / Tuning frequency	80 dm³

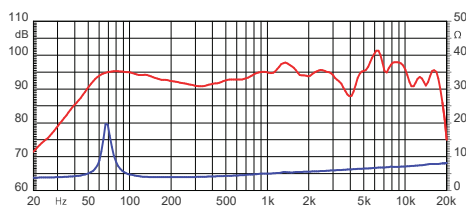

PH320



Extended range
Dual cone
Cellulose fiber membrane and surround

GENERAL SPECIFICATIONS

Program power	220 W
Rated impedance	8 Ω
Nominal diameter	12"- 320 mm
Sensitivity (1W/1m)	100 dB
Voice coil diameter	50 mm
Frequency range	45 - 12000 Hz

TECHNICAL SPECIFICATIONS

Power handling capacity	120 W
Gap height	8 mm
N. of mounting holes	8 ø 7 / ø 295
Front mount baffle cutout ø	285 mm
Re	6 Ω
Fs	65 Hz
Qms	3,29
Qes	0,43
Qts	0,38
Mms	34 g
Cms	0,17 mm/N
D	255 mm
Vas	62 dm³
B · l	14 Wb/m
Xmax	1,30 mm
η _o	3,80 %
Le	0,50 mH
Net Weight	5,30 Kg
Recommended loading	Bass reflex
Volume / Tuning frequency	56 dm³ / 70 Hz

