


HT200




Polyamide soft dome

GENERAL SPECIFICATIONS


Program power	100 W
Rated impedance	8 Ω
Nominal diameter	0,78"/20mm
Sensitivity (1W/1m)	90 dB
Voice coil diameter	20 mm
Frequency range	2,5 - 20 kHz

TECHNICAL SPECIFICATIONS

Power handling capacity	60 W
Gap height	2 mm
N. of mounting holes	4 ∅ 4 / ∅ 81
Front mount baffle cutout ∅	70 mm
Re	5,60 Ω
Fs	1 kHz
Qms	4,70
Qes	1,60
Qts	1,20
Mms	0,30 g
Cms	-
D	23 mm
Vas	-
B * l	2,60 Wb/m
Xmax	-
η ₀	-
Le	0,05 mH
Net weight	0,28 Kg
Recomm. crossover freq.	3,5 kHz
Volume / Tuning frequency	-

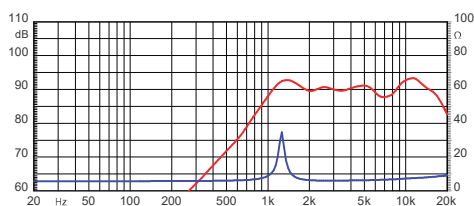

CT200



Polyamide soft dome

GENERAL SPECIFICATIONS

Program power	100 W
Rated impedance	4 Ω
Nominal diameter	0,78"/20mm
Sensitivity (1W/1m)	90 dB
Voice coil diameter	20 mm
Frequency range	2,5 - 20 kHz

TECHNICAL SPECIFICATIONS

Power handling capacity	60 W
Gap height	2 mm
N. of mounting holes	4 ∅ 4 / ∅ 81
Front mount baffle cutout ∅	70 mm
Re	3,00 Ω
Fs	1 kHz
Qms	4,70
Qes	1,10
Qts	0,90
Mms	0,28 g
Cms	-
D	23 mm
Vas	-
B * l	2,17 Wb/m
Xmax	-
η ₀	-
Le	0,02 mH
Net weight	0,28 Kg
Recomm. crossover freq.	3,5 kHz
Volume / Tuning frequency	-

