


# HT263




Silk dome  
Diecast aluminum flange

## GENERAL SPECIFICATIONS


Program power	200 W
Rated impedance	<b>8 Ω</b>
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	91 dB
Voice coil diameter	26 mm
Frequency range	2,5 - 20 kHz

## TECHNICAL SPECIFICATIONS

Power handling capacity	100 W
Gap height	3 mm
N. of mounting holes	4 ø 5 / ø 96
Front mount baffle cutout ø	75 mm
Re	6,50 Ω
Fs	1 kHz
Qms	3,50
Qes	1,23
Qts	0,90
Mms	0,35 g
Cms	-
D	28 mm
Vas	-
B · l	3,40 Wb/m
Xmax	0,10 mm
η <sub>o</sub>	-
Le	0,07 mH
Net weight	0,65 Kg
Recomm. crossover freq.	3 kHz
Volume / Tuning Frequency	-

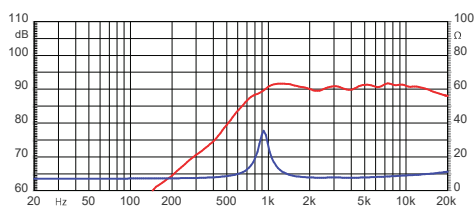

# HT269



Treated fabric dome  
Diecast aluminum flange

## GENERAL SPECIFICATIONS

Program power	200 W
Rated impedance	<b>8 Ω</b>
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	90 dB
Voice coil diameter	26 mm
Frequency range	2 - 20 kHz

## TECHNICAL SPECIFICATIONS

Power handling capacity	100 W
Gap height	3 mm
N. of mounting holes	4 ø 5 / ø 96
Front mount baffle cutout ø	75 mm
Re	6,20 Ω
Fs	900 Hz
Qms	4,68
Qes	1,37
Qts	1,06
Mms	-
Cms	-
D	28 mm
Vas	-
B · l	-
Xmax	-
η <sub>o</sub>	-
Le	0,08 mH
Net weight	0,645 Kg
Recomm. crossover freq.	2,7 kHz
Volume / Tuning Frequency	-

